

## Technické listy G Série



### Základní informace

KSF G 76x2100-3xM16	KSF G 76x1600-3xM16	KSF G 76x1300-3xM16
Délka (mm)		
2100	1600	1300
Průměr (mm)		
76.10	76.10	76.10
Váha (kg)		
14.00	10.50	8.50
Číslo položky		
25456	25455	25454

### Konstrukce

- Matice: DIN EN ISO 4032 - 8
- Kontinuální svařovaná šroubovice
- Plášť: Žárově pozinkovaný v souladu s DIN EN ISO 1461


### Použití

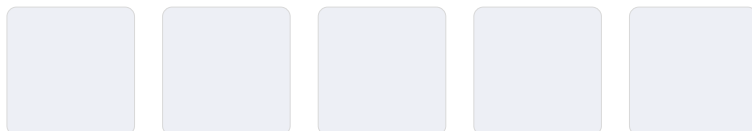

KSF G 76x  
1300-3xM16

**Technická data**

	<b>KSF G 76x2100-3xM16</b>	<b>KSF G 76x1600-3xM16</b>	<b>KSF G 76x1300-3xM16</b>
<b>a</b>	<b>Délka (mm) (<math>\pm 25</math> mm)</b>		
	2080	1580	1280
<b>b</b>	<b>Vnější průměr vrtu (mm)</b>		
	76.10	76.10	76.10
<b>c</b>	<b>Vnitřní průměr (mm)</b>		
	68.90	68.90	68.90
<b>d</b>	<b>Nastavení průměru (mm)</b>		
	60	60	60
<b>e</b>	<b>Nastavení hloubky (mm) (<math>\pm 25</math> mm)</b>		
	1815	1315	1020
<b>f</b>	<b>Závit</b>		
	3xM16	3xM16	3xM16

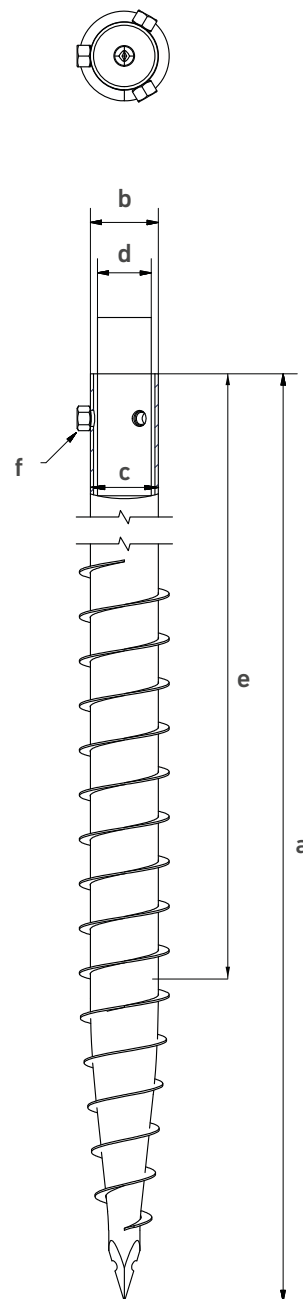
**Online služby**

	<b>KSF G 76x2100-3xM16</b>	<b>KSF G 76x1600-3xM16</b>	<b>KSF G 76x1300-3xM16</b>
<b>Webkey</b>	G2545611D	G2545511D	G2545411D

