

Technické listy G Série






Základní informace

KSF G 76x2100-3xM16	KSF G 76x1600-3xM16	KSF G 76x1300-3xM16
Délka (mm)		
2100	1600	1300
Průměr (mm)		
76.10	76.10	76.10
Váha (kg)		
14.00	10.50	8.50
Číslo položky		
25456	25455	25454

Konstrukce

- Matice: DIN EN ISO 4032 - 8
- Kontinuální svařovaná šroubovice
- Plášť: Žárově pozinkovaný v souladu s DIN EN ISO 1461


Použití



KSF G 76x
1300-3xM16

Technická data

	KSF G 76x2100-3xM16	KSF G 76x1600-3xM16	KSF G 76x1300-3xM16
a	Délka (mm) (± 25 mm)		
	2080	1580	1280
b	Vnější průměr vrtu (mm)		
	76.10	76.10	76.10
c	Vnitřní průměr (mm)		
	68.90	68.90	68.90
d	Nastavení průměru (mm)		
	60	60	60
e	Nastavení hloubky (mm) (± 25 mm)		
	1815	1315	1020
f	Závit		
	3xM16	3xM16	3xM16

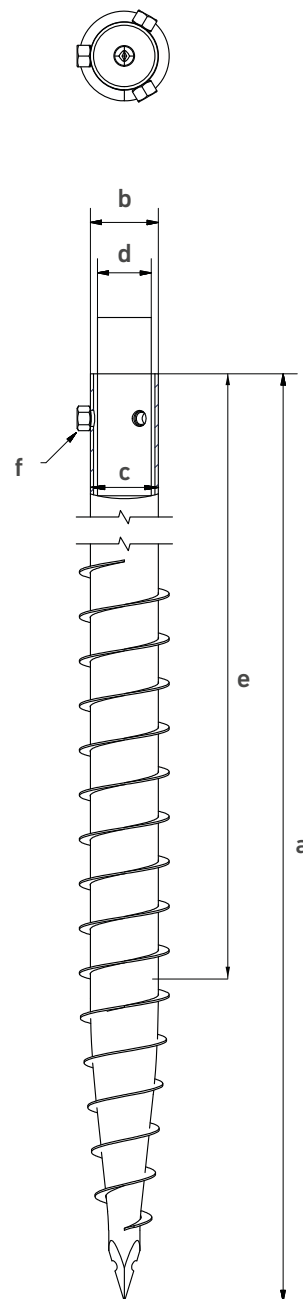

Online služby

	KSF G 76x2100-3xM16	KSF G 76x1600-3xM16	KSF G 76x1300-3xM16
Webkey	G2545611D	G2545511D	G2545411D

